



Hopper mount dryer configuration shown with optional drying hopper

ACD10 COMPRESSED AIR DRYERS

The ACD10 compressed air dryer offers efficient drying performance in an ultra-compact cabinet. The 12" x 12" x 6" dryer cabinet fits easily into the tightest spaces, and for added flexibility, it can be located on the floor or directly on the drying hopper. The dryer is so effective, it can reduce the incoming compressed air source dewpoint by up to 50°F to as low as -10°F (-40°F with the optional membrane dryer).

The ACD10 dryer is not only small and efficient, but it is also easy to set up. Your dryer can be on-line and operational in just minutes, and the off-the-shelf microprocessor controller is exceptionally easy to use. Air enters the system through a solenoid and is filtered through a large particle compressed air filter before it moves through the heating element. The optional membrane dryer includes a high-efficiency 0.1-micron filter assembly, which ensures that the air entering the membrane is clean. The ACD10 dryer is designed for maintenance-free, continuous 24-hour operation.

DRYER FEATURES

- Hopper mount configuration
- Average dewpoint of -10°F (-40°F with optional membrane dryer)
- 115/1/60 operation (other voltages available)
- Heating capabilities up to 400°F
- Large particle compressed air filter with regulator
- Exhaust air cartridge filter
- Optional membrane dryer with 0.1 micron filter assembly
- Optional floor mount configuration
- 10 cfm (17 m³/hr)

STANDARD CONTROLLER FEATURES

- Off-the-shelf 1/16 DIN temperature controller
- High process temperature alarm light
- Automatic shutoff system to monitor compressed air supply, high temperature and process temperature alarms

PERFORMANCE

- Designed for continuous 24 hour operation
- Designed for maintenance-free operation



Optional floor mount model






Model	Width, in. (mm)	Height, in. (mm)	Depth, in. (mm)	Weight, lbs. (Kg)
ACD10	7.3 (185)	13.4 (339)	15.7 (396)	25 (11.3)

PERFORMANCE

- Operates with 115/1/60
- Average dew point temperature of -10°F (-23°C)
- Full load amps: 12.5 @115V
6.25 @ 230V
- Approximate weight: 25 lbs. (11.3 kg)
- 10 CFM (17 m³/hr) process air
- Requires approximately 2 SCFM compressed air at 80 psig for proper operation

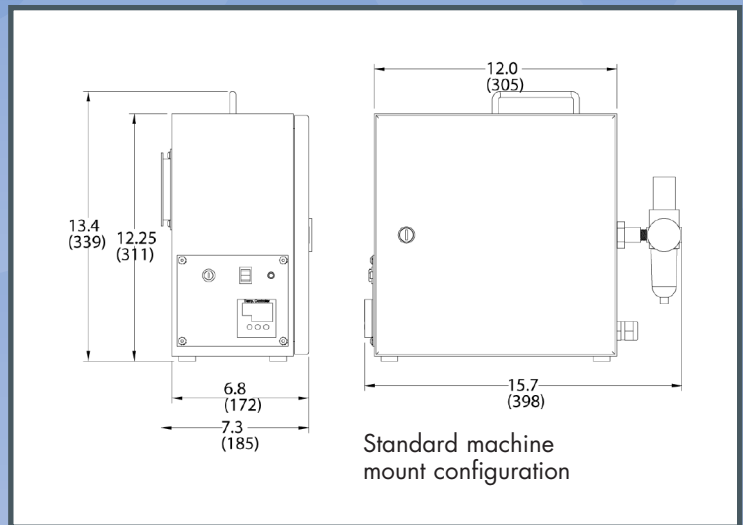

www.aecinternet.com
aecweb@corpemail.com

AEC is committed to a continuing program of product improvement. Specifications, appearances and dimensions are subject to change without notice.
 © 2011 AEC Bulletin WH1-160.3 Printed in USA



ACD10 COMPRESSED AIR DRYERS



Global Headquarters:

AEC Schaumburg
 1100 E. Woodfield Rd
 #588
 Schaumburg, IL 60173
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

AEC New Berlin
 2900 S. 160th Street
 New Berlin, WI 53151
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653



AEC Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916



AEC Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: + 48 22 390 9720
 Fax: + 48 22 390 9724



AEC India
 Regus, Level 2, Connaught Place
 Bund Garden Road, Pune 41100,
 India
 Tel: +91 20 4014 7575/40147615
 Fax: +91 93 7115 4045