



WD HIGH CAPACITY DRYERS

AEC WD Series High Capacity Dehumidifying Dryers feature 350-500 CFM (595-850 m³/hr) ratings and offer user friendly off-the-shelf controls. The unit provides a compact frame with minimum moving parts, easy accessibility for maintenance, and a small footprint. Every dryer is factory-tested before shipment to assure reliable performance for years to come. Optimal desiccant utilization guarantees lowest dew point.

OFF-THE-SHELF CONTROL PACKAGE

The Control Panel features illuminated flush-mounted buttons for protection. The buttons are color-coded to indicate graphic functions. Off-the-shelf controller displays process, actual, and regeneration temperatures. Standard high-visibility, temperature compensated dew point monitor features adjustable "Dew Point Extend" limit for maximum efficiency.


Primary alarms offer visual indication of:

- High or low process temperature
- High or low regen temperature
- High dew point
- Process or regen blower failure

Optional Alarms

- Dirty process and regen filter
- Control valve positioning error



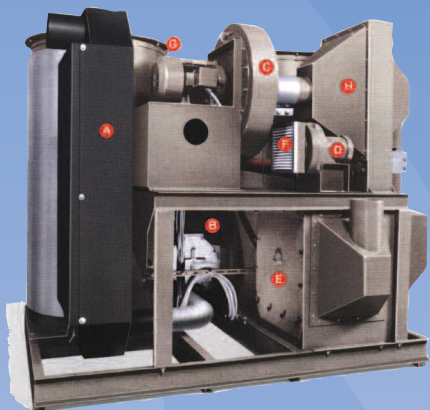

EASY MAINTENANCE

Rear view of these WD Series dryers allows easy access to component parts for maintenance.


HEATERS: process (A) and regeneration (B) heater are easily accessible.

BLOWERS: process (C) and regeneration (D) blowers are positioned for easy reach.

FILTERS: process filter cartridges (E) provide convenient accessibility for normal maintenance and replacement. Permanent washable regeneration air screen filters (F) offer easy access for maintenance; no tools required.

DESICCANT: To directly access the desiccant, unbolt the tower cover.

AFTER COOLER: Optional integrally-mounted after cooler offers removable coil assembly (H) for easy cleaning.

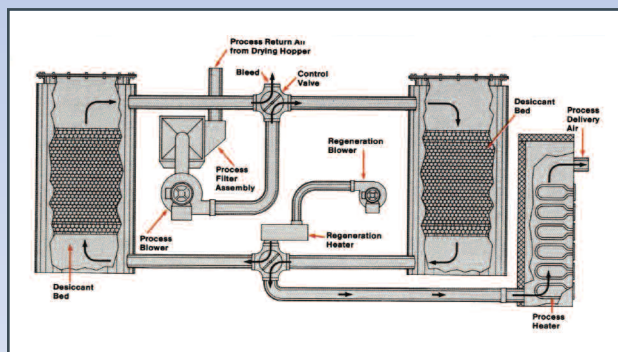

DRYING CYCLE

The closed loop system maintains a constant rate of drying by alternatively operating desiccant beds. The beds contain moisture absorbent, molecular sieve. Cool, wet air returns from the drying hopper and passes through cartridge filters. Before entering the blower, the air returns through the upper control valve and into the onstream desiccant bed. Molecular sieve desiccant in the bed absorbs moisture from the air which proceeds through the lower control valve, and into the process air heater before returning to the drying hopper.

REGENERATION CYCLE

The on-stream desiccant bed absorbs moisture from the process air while the regenerating desiccant bed releases moisture picked up during its on-stream cycle. The regeneration blower draws air and blows across the regeneration air heater. 550°F heated air passes through the lower control valve to the regeneration desiccant bed. Heated air absorbs moisture from the desiccant through the upper control valve to the bleed which vents it to the atmosphere.

In reverse direction of the process air, regeneration air blows through the desiccant bed from bottom to top. When the regenerating desiccant bed dries, the regeneration air heater shuts off. The regeneration blower continues to circulate air to cool down the desiccant bed. Dew point demand switches the regenerating bed to become the on-stream bed. Simultaneously, the on-stream bed switches to become the regenerating bed.

www.aecinternet.com
aecweb@corpemail.com

AEC is committed to a continuing program of product improvement. Specifications, appearances and dimensions are subject to change without notice.
© 2011 AEC Bulletin WH1-105B.9 Printed in USA



WD HIGH CAPACITY DEHUMIDIFYING DRYERS



Global Headquarters:

AEC Schaumburg
1100 E. Woodfield Rd
#588
Schaumburg, IL 60173
Tel: +1 847 273 7700
Fax: +1 847 273 7804

AEC New Berlin
2900 S. 160th Street
New Berlin, WI 53151
Tel: +1 262 641 8610
Fax: +1 262 641 8653



AEC Suzhou
109 Xingpu Road SIP
Suzhou, China 215126
Tel: +86 512 8717 1919
Fax: +86 512 8717 1916



AEC Warsaw
ul.Dziakowa 115
02-234 Warszawa
Tel: + 48 22 390 9720
Fax: + 48 22 390 9724



AEC India
Regus, Level 2, Connaught Place
Bund Garden Road, Pune 41100,
India
Tel: +91 20 4014 7575/40147615
Fax: +91 93 7115 4045