

Get More From Your Production Floor

AEC brings you all the technologies you need to advance uptime, energy efficiency and performance in your operation. Turn to our technical support team to evaluate your expected system loads and load characteristics, energy and climate-related issues as well as incorporating new equipment with plastics processing equipment you already own.

AEC History

Application Engineering Company, now known worldwide as AEC has roots dating back to 1957. AEC initially began serving the plastics industry with innovative chiller and cooling tower solutions, and has established itself as the go-to solutions provider for the most challenging process cooling applications. Today, AEC continues to offer a broad portfolio of portable, packaged, and central chillers. AEC supplies innovative solutions and has grown to be a leader in process temperature control, blending, drying, conveying, and size reduction applications in plastic processing, food & pharmaceutical industries.

Aftermarket Service & Support

AEC has a service network across the United States and in several key international locations. We are focused on having the right people and products in the right places to keep our customers running efficiently. Whether you need On-Site Service, Technical Support & Training, Parts Support or even Product Repair & Refurbishment, we have you covered. Contact our team today for all of your aftermarket needs at 262-641-8600 or service@acscorporate.com.

About ACS Group

The ACS Group designs, manufactures, markets and supports one of the most comprehensive lines of auxiliary products for the plastics processing industry. Over the years, ACS Group has grown both organically through technical innovation and through acquisition. ACS Group offers an expansive product line, which includes size reduction equipment (granulators and shredders), material conveying equipment, metering and blending devices, heat exchangers (mold temperature controls units and chillers), drying systems, and hydraulic presses.



ACS Group | 2900 South 160th Street, New Berlin, WI 53151
P: 1.262.641.8600 **E:** info@acscorporate.com **W:** acscorporate.com



AEC

Blending | Conveying | Drying
Process Cooling | **Heat Transfer** | Size Reduction

TrueTemp® TC 100 SERIES

Temperature Control Units



Trusted Reliability

Customizable Units

Advanced Controls with Connectivity

Setting the standard in temperature control functionality and design with operating ranges from 32°F to 250°F and pump offerings of $\frac{3}{4}$ to 7½ HP on compact models and $\frac{3}{4}$ to 10 HP on upright models.

www.aecinternet.com

TC110

Increased Availability

Exceptional Value

Ease of Service



TC120

Historical Reliability

Increased Customization

Durable Design



TC130

Pressure Adaptive Technology

Predictive Maintenance

Increased Longevity & Reliability



TrueTemp® TC 100 SERIES

Superior reliability with TrueTemp® TC 100 Series Temperature Control Units

Improving upon the standard in Temperature Control Units.

The TrueTemp TC 100 Series features a family of temperature control units ranging in features and capabilities to meet the needs of any project. The family of TCUs gives users multiple options for full customization, offering a solution for every application. From the small and economical TC110, to the state-of-the-art TC130, the TrueTemp TC 100 Series of Temperature Control Units continues to build upon the historical legacy of AEC.

As the leading supplier of TCUs, AEC is the brand you can rely on. The TrueTemp name has been trusted for generations to provide the absolute best temperature control in the industry.



TC130 Series Compact
Temperature Control Unit (TCU)

Industry Leading Support Available

Full System Provider

AEC can provide the full system set up including pump tanks, remote condensers, chillers, cooling towers, hybrid adiabatic systems, winter coolers, heat exchangers, filtration equipment, and temperature control units.

Technical Support & Training

AEC provides expert technical support and training, allowing customers to get the most out of their production environment.

On-Site Service

Service and support is available to provide regular maintenance and emergency service at your facility.

Parts Support

Thousands of parts in stock, ready for same day shipment including specific wear parts. Parts customer service representatives are ready to assist, ensuring you get the part you need - when you need it.

Applications

The TC 100 Series TCUs can be utilized in any application that requires accurate temperature control. Typical applications include, but are not limited to, the following:

- Injection molding
- Blow molding
- Extrusion
- Thermoforming
- Food & Beverage
- Pharmaceutical
- Packaging
- Medical
- Die Casting
- Lasers
- Rubber Processing
- Converting

TrueTemp® TC 100 Series *The same TCU you have come to trust*


TrueTemp® TC110 Series | Value • Availability • Serviceability

The TC110 Series is the most affordable and economical TCU from AEC. The TC110 is known for ease of service, featuring an open design with removable side panels. With a standard Eurotherm controller and simplified design, the TC110 is the perfect choice to meet basic application needs.



TrueTemp® TC120 Series | Historical Reliability • Customizable • Durable

The TrueTemp® TC120 Series is the industry standard. The TC120 is the TCU thousands of people have come to expect and depend on from the leader in temperature controls for more than 60 years. Featuring a robust design (under NEMA 12 standards), increased cooling accuracy, and larger, more durable casters, the TC120 Series is more reliable and durable than ever. Available options include an advanced controller, up to 24kW heaters, modulating valves, and customization to your unique specifications.

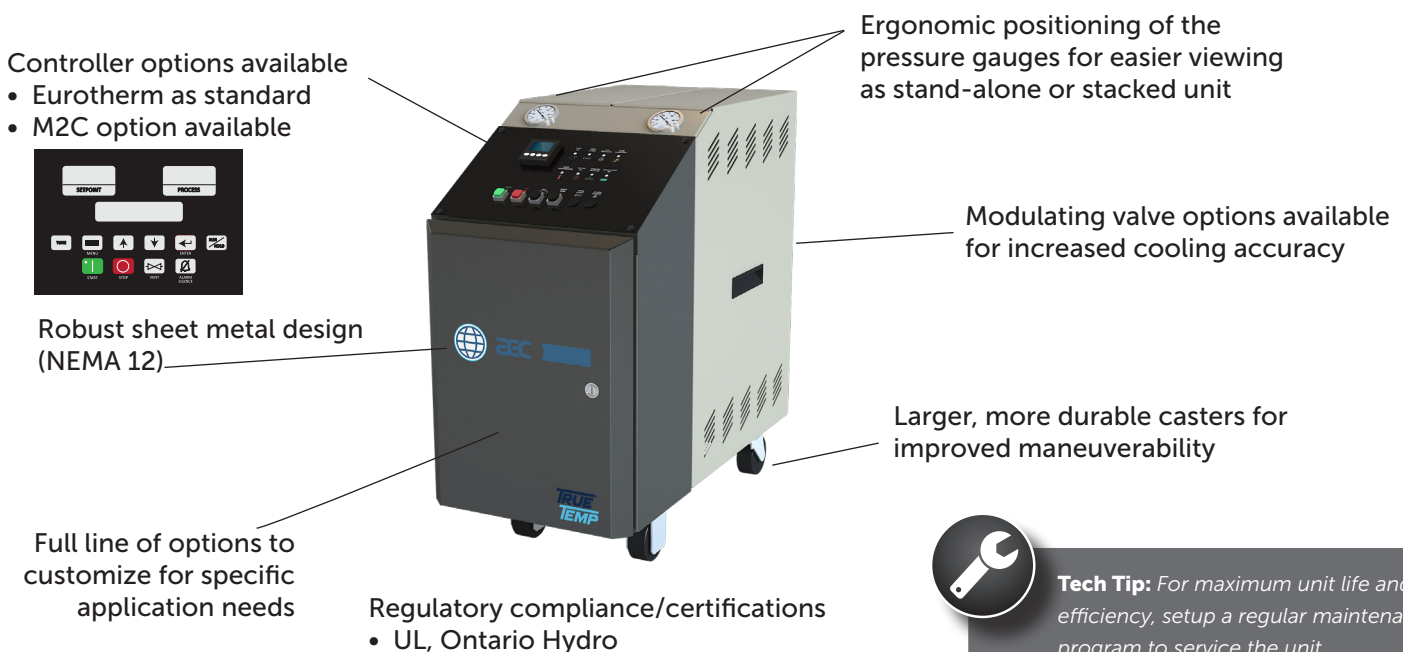

Tech Tip: For maximum unit life and efficiency, setup a regular maintenance program to service the unit.

st, now available in a variety of offerings with advanced options to meet your needs.

TrueTemp® TC130 Series | Intelligent • Predictive • Reliable

The TrueTemp® TC130 Series is the most advanced TCU from AEC. This latest innovation features increased options for maximum flexibility, along with state-of-the-art controls and a 5" PLC color touch screen. These advanced controls provide predictive maintenance features as well as intelligent capabilities like Pressure Adaptive Technology utilizing analog pressure transducers. Troubleshooting is made easy via USB data logging and remote monitoring. All of this comes with the longevity and reliability you've come to expect from AEC TCUs.



Smart Controls for a Smarter Facility

Pressure Adaptive Technology


- Ability to temporarily reduce temperature if water pressure drops, preventing nuisance shutdowns
- Only requires necessary water pressure for temperature set point

Contactors Cycle Life Indication

- Monitors contactor cycling and notifies near end of life

Connectivity

- MODBUS TCP, MODBUS RS-485, Ethernet - Standard, OPC UA / Euromap 82.1 (Tested w/ Arburg, Milacron)

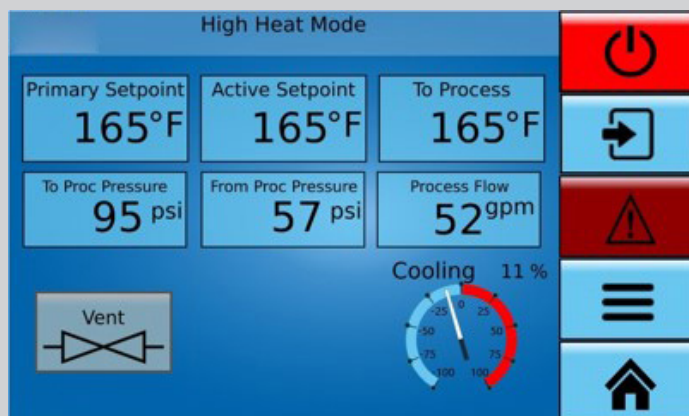

TrueTemp® TC 100 SERIES

Service & Performance Category	TC110	TC120	TC130 / TC131
Heating Capacity	Up to 12kW	Up to 24 kW	Up to 48 kW
Pumps	Up to 3 HP	Up to 7 1/2 HP	Up to 10 HP
Valve Sizes	1/4" - 1/2" Solenoid	1/4" - 1 1/2" Solenoid 1/2" - 1 1/4" Modulating	1/4" - 1 1/2" Solenoid 1/2" - 1 1/4" Modulating
Voltages	230 - 460 V, 60 Hz	208 - 575 V, 60 Hz 380 - 415 V, 50 Hz	208 - 575 V, 60 Hz 380 - 415 V, 50 Hz
Controller	Eurotherm	Eurotherm or M2C	TS-5
Warranty*	1 Year Parts	1 year parts (Eurotherm) 2 year parts (M2C)	2 year parts
Available Features & Options			
High Temperature Safety Thermostat	•	•	•
Low Supply Pressure Sensing	•	•	•
Manual bypass	•	•	•
Pressure regulator/relief Valve	•	•	•
Mold purge	•	•	•
Quick Cool	•	•	•
Programmable Auto-vent	•	•	•
Tune	•	•	•
Audio/visual alarm		•	•
Remote Setpoint & Analog Retransmission		•	•
MODBUS RS-485		•	•
Ethernet - Standard		•	•
Half/Full Heat		•	•
Flow Meters		•	•
MiVue® - Digital Solutions Platform		•	•
Remote Control			•
5" PLC Color Touch Screen			•
USB Data Logging			•
Analog Pressure Transducers			•
Pressure Adaptive Technology			•
OPC UA / Euromap 82.1			•
MODBUS TCP			•
Closed Loop Heat Exchanger			•

* Controllers have a 3 year parts warranty

TC110



TC120




TC130



Specifications

Model	Dimensions in Inches (cm)			Shipping Wt. Lbs (Kg)*
	Height	Width	Depth	
TC110	26.3 (66.7)	12.0 (30.5)	26.8 (67.9)	210 (95)
TC120	28.8 (73.0)	14.0 (35.6)	28.0 (71.1)	210 (95)
TC130	28.8 (73.0)	14.0 (35.6)	28.0 (71.1)	210 (95)
TC131	51 (129.5)	14.0 (35.6)	28.0 (71.1)	240 (109)

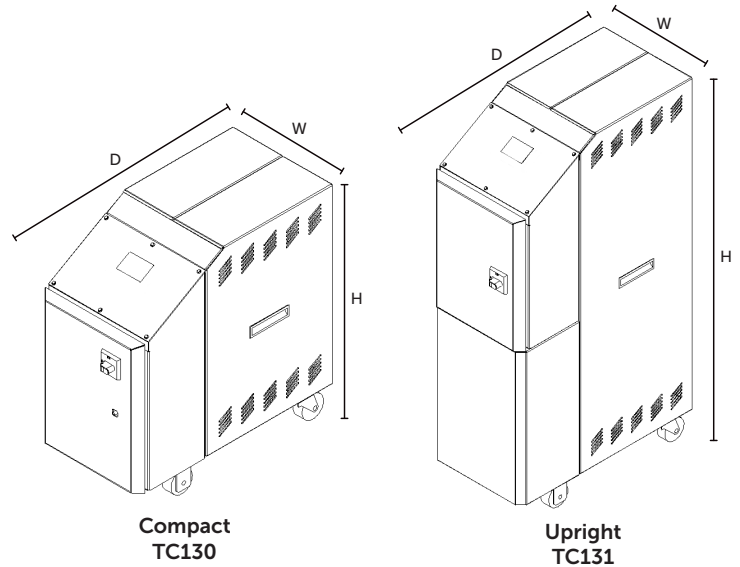

Pump Curves

Charts show flows and pressures that are available for the standard pump options. Custom pumps available upon request.

Pump HP (kW)	Flow GPM (LPM)	Pressure PSIG (kPa)
0.75 (.56)	30 (114)	25 (172)
1.0 (0.75)	35 (133)	30 (207)
2.0 (1.5)	50 (189)	30 (207)
3.0 (2.24)	60 (227)	40 (276)
5.0 (3.76)	75 (284)	54 (372)
7.5 (5.6)	90 (341)	63 (434)
10 (7.5)	120 (454)	55 (379)

